
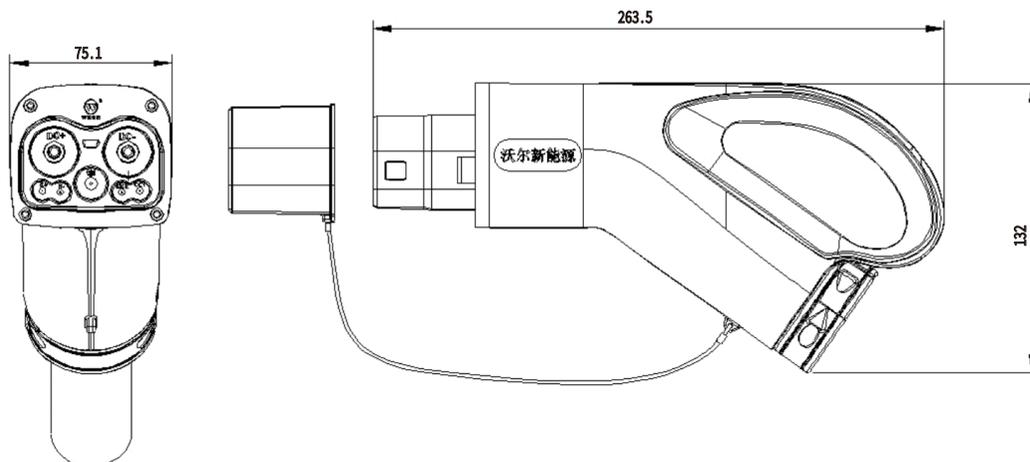


CHAOJI液冷直流充电枪

CHAOJI Liquid Cooled DC Charging Connector

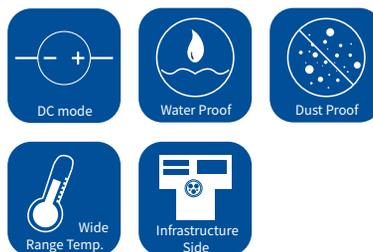

额定电压 Rated Voltage	1000 V DC Max.
额定电流 Rated Current	500A/600A/800A
耐电压 Withstand Voltage	3500V AC
最大峰值电流值 Maximum Peak Current	600A/700A/1000A
绝缘电阻 Insulation Resistance	≥500MΩ
环境温度 Operating Temperature	-30°C~50°C
防护等级 Protection Degree	枪体内部(inside the charging connector)IP67 /对插状态中(mated)IP55
阻燃等级 Flame Retardant Grade	UI94 V-0
插拔力 Insertion and Separation Forces	F<125N
插拔寿命 Mechanical Lifetime	10000次
冷却功率要求 Cooling Power size	2.4KW
冷却液流量 Cooling Liquid flow	2.5~4LPM
导电部件最高工作温度 Terminal Working Temperature	90°C
最大允许压力 Maximum Allowable Pressure	0.6Mpa Max.